


Real deep UV Q-switched solid-state laser,  
213 nm wavelength, TEM<sub>00</sub> beam profile

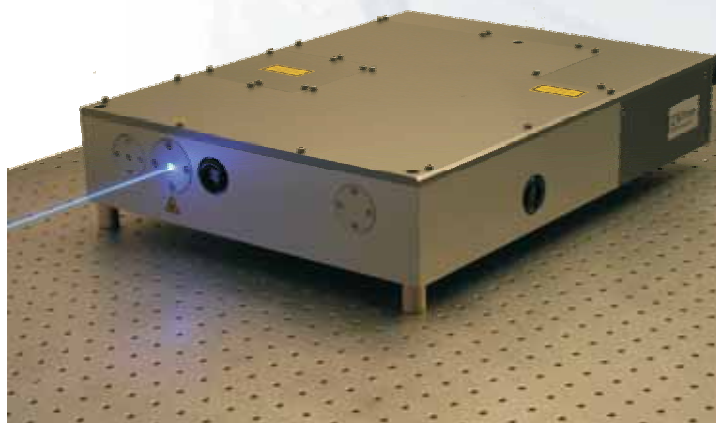

## Applications

- Fiber Bragg grating fabrication
- Wavelength sensitive processes
- Stereo-lithography
- Display repair
- Micro-machining
- Semi-conductor inspection
- Replacement of freq. doubled Ar-Ion lasers
- Photoluminescence measurements

## General Description

The IMPRESS 213 laser system is a high repetition rate solid-state diode pumped Q-switched laser with an emission wavelength of 213 nm. Its precise TEM<sub>00</sub>-mode laser beam is well suited for metrology and micro-machining such as semi-conductor or display repair. Due to the very short wavelength structure sizes below 1 μm are possible in direct writing applications. The laser delivers < 7 ns short pulses with a superior beam quality of M<sup>2</sup> < 1.6. The laser system is completely computer controlled via a RS-232 interface. Different trigger control modes are available. The system operates autoranging from 90-240 VAC, 47-63 Hz.

## Features

- Extremely short UV wavelength
- Diode laser pumped
- Slot mounted laser diode
- Excellent beam profile
- High pulse power
- Ultra low maintenance costs
- "Green Photonics"
- 24/7 continuous industrial use


## Product Specifications

Model	IMPRESS 213
wavelength	213 nm
average power	100 mW
pulse duration	< 7 ns
energy per pulse	> 10 μJ
repetition rate	0.1-30 kHz
M <sup>2</sup>	< 1.6

Specifications are subject to change without notice due to product improvement.

## Outstanding in FBG writing

- Extremely fast writing
- No Hydrogen loading necessary

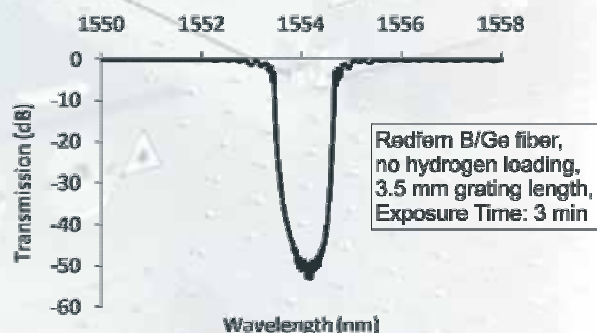



## System Dimensions (L x W x H), weight

<b>Laser head</b>	500 x 390 x 118 mm <sup>3</sup>	21 kg
<b>Power supply</b>	446 x 440 x 134 mm <sup>3</sup>	16.8 kg
<b>Chiller</b>	446 x 440 x 134 mm <sup>3</sup>	18.5 kg

## Electrical Characteristics


<b>Operating voltage</b>	85-264 VAC
<b>Frequency</b>	47 – 63 Hz
<b>Power consumption</b>	300 W typ.

## Typical Performance

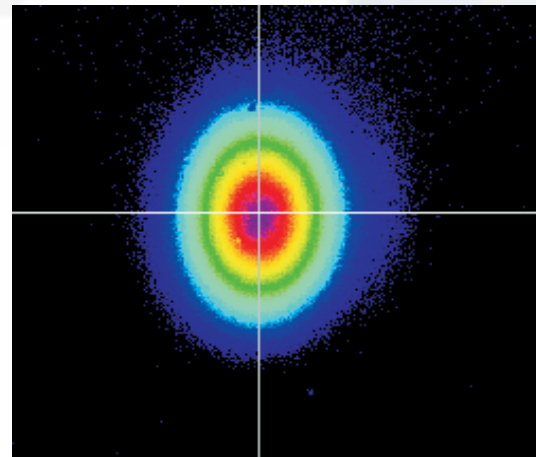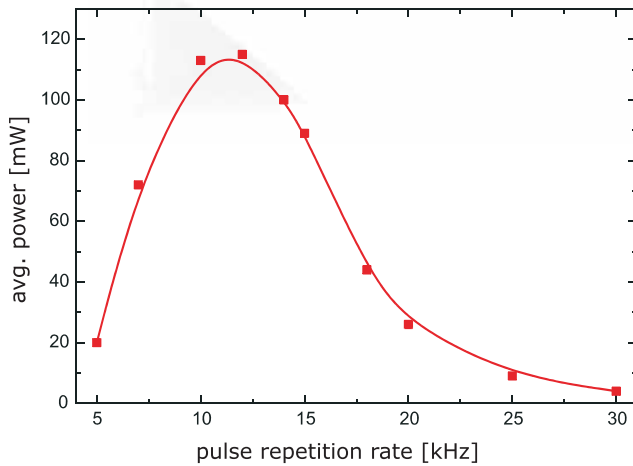

## Dimensions Laser Head


Front view

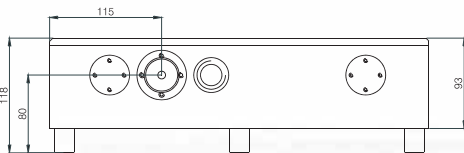

Side view



Top view

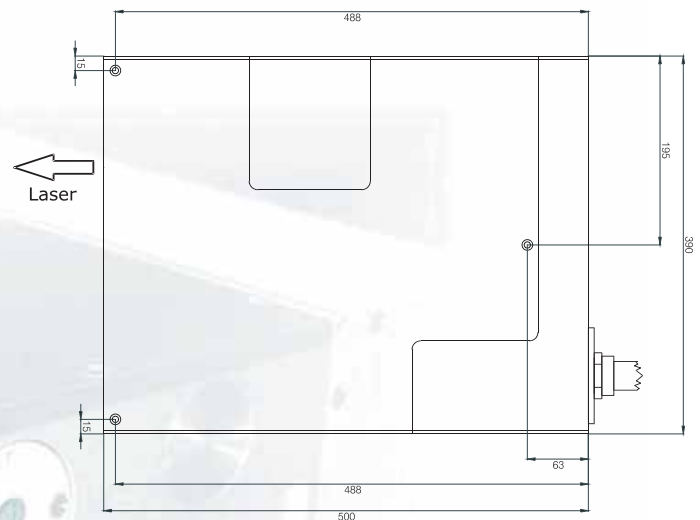

Visible and/or invisible laser radiation. Avoid eye or skin exposure to direct or scattered radiation.  
Class 4 laser ( IEC-825)



Xiton Photonics GmbH  
Kohlenhofstrasse 10  
D-67663 Kaiserslautern  
Germany

Tel.: +49 (0)631 414 9944-0  
Fax: +49 (0)631 414 9944-9  
sales@xiton-photonics.com  
www.xiton-photonics.com